

Disjoint Group Targeting

In some cases you may want to randomly assign your site visitors to some number of non-overlapping groups and then target them based on the group to which they've been assigned. Doing so allows you to maintain consistency across multiple related experiences.

Monetate provides a Disjoint Group WHO target that performs this assignment.

i If you want to use the Disjoint Group target in experiences, you must first contact your dedicated Customer Success Manager (CSM) to request that the **Disjoint Group Predicate** feature flag be enabled for your account. This requirement applies both to clients using the Monetate tag and to clients using the Engine API.

When you configure the Disjoint Group target, you specify the number of disjoint groups as well as the range of groups that you want to target in the current experience. For a given number of disjoint groups, assignment is deterministic, meaning that the same visitor is always assigned to the same disjoint group—not only across experiences but across sessions.

For example, you have eight related experiences and only want 25% of site visitors to be exposed to them.


It's possible to construct them as 25% experiment/75% control experiences, but then each visitor would be randomly assigned to each experience independently. One visitor might be assigned to the experiment condition for two of the eight experiences and to the control condition for the other six.

If instead you want one in four visitors to qualify for all eight experiences and the remaining visitors qualify for none of the eight experiences, then you can set up a Disjoint Group target in each experience. You identify that there are four disjoint groups total, and that a visitor should only qualify for the experience if they are in group 1.


Configuring a Disjoint Group Target

Follow these steps to add a Disjoint Group target to a Web experience.


1. Click **WHO**.
2. Click **Landing**.

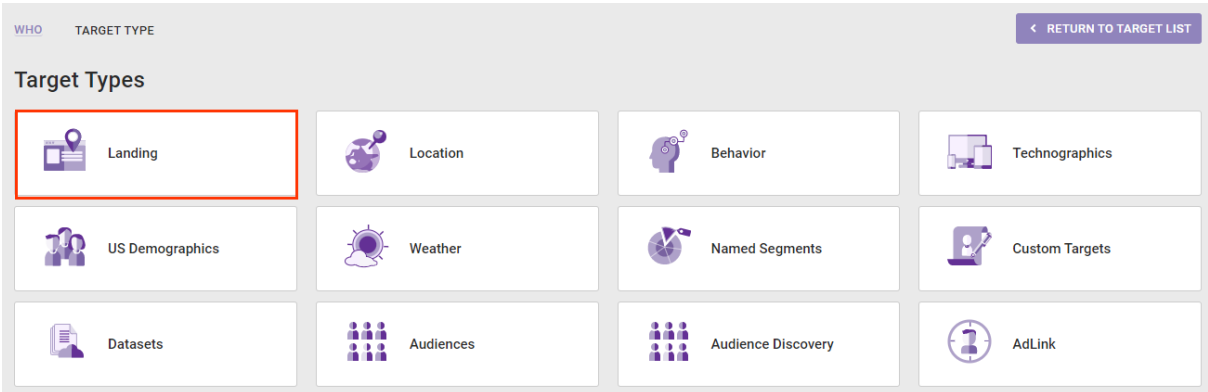

3. Click **Disjoint Group**.

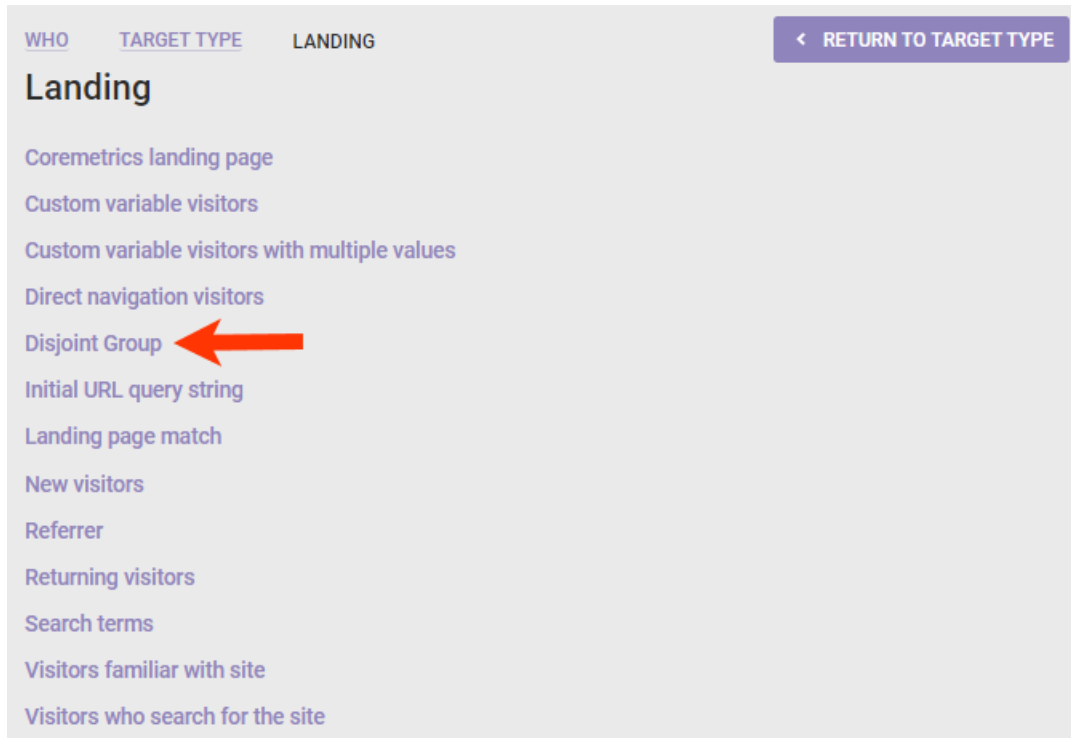

4. Input the total disjoint groups for the target.

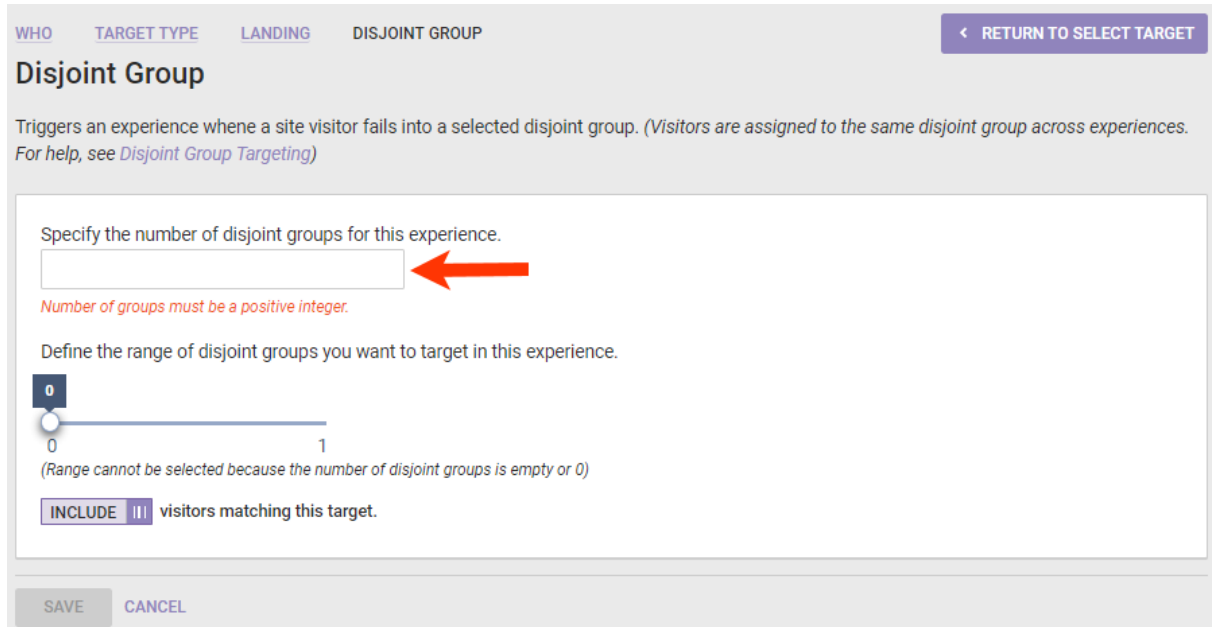

5. Adjust one or both sides of the slider to determine the range of disjoint groups that you want to target.

WHO TARGET TYPE LANDING DISJOINT GROUP [RETURN TO SELECT TARGET](#)

Disjoint Group

Triggers an experience when a site visitor fails into a selected disjoint group. (Visitors are assigned to the same disjoint group across experiences. For help, see [Disjoint Group Targeting](#))

Specify the number of disjoint groups for this experience.

Define the range of disjoint groups you want to target in this experience.

1 9

1 9

(Drag sliders to select a beginning and end to your range)

INCLUDE visitors matching this target.

- Optionally, toggle **INCLUDE** to **EXCLUDE** if you want the visitors identified by the target to be excluded from the experience.

WHO TARGET TYPE LANDING DISJOINT GROUP [RETURN TO SELECT TARGET](#)

Disjoint Group

Triggers an experience when a site visitor fails into a selected disjoint group. (Visitors are assigned to the same disjoint group across experiences. For help, see [Disjoint Group Targeting](#))


Specify the number of disjoint groups for this experience.

Define the range of disjoint groups you want to target in this experience.

2 7

1 9

(Drag sliders to select a beginning and end to your range)

INCLUDE visitors matching this target. 

- Click **SAVE**.

WHO TARGET TYPE LANDING DISJOINT GROUP [RETURN TO SELECT TARGET](#)

Disjoint Group

Triggers an experience when a site visitor fails into a selected disjoint group. (Visitors are assigned to the same disjoint group across experiences. For help, see [Disjoint Group Targeting](#))

Specify the number of disjoint groups for this experience.

Define the range of disjoint groups you want to target in this experience.

1 2 7 9
(Drag sliders to select a beginning and end to your range)

INCLUDE visitors matching this target.

Complete the rest of the experience settings, and then [preview](#) or activate it.

How Disjoint Group Targeting Works

Monetate uses its own identifier, the Monetate ID, to track each site visitor within and across [sessions](#).

In a Disjoint Group target, Monetate uses a simple algorithm to transform that Monetate ID into a number between 0 and 1. Crucially, the same input always generates the same output, so for any given Monetate ID, the algorithm always produces the same number.

This number is then used to assign the site visitor to a disjoint group. If there are four disjoint groups total, then a visitor is assigned as follows:

- Group 1 if their number is greater than or equal to 0.00 but less than 0.25
- Group 2 if their number is greater than or equal to 0.25 but less than 0.50
- Group 3 if their number is greater than or equal to 0.50 but less than 0.75
- Group 4 if their number is greater than or equal to 0.75 but less than 1.00

This assignment remains static over time, so the site visitor is always part of the same disjoint group.

It's possible to have multiple experiences running that use disjoint groups of various sizes. For instance, some experiences might have a Disjoint Group target configured with N=4 total disjoint groups, while other experiences might have a Disjoint Group target configured with N=6 total disjoint groups. Group assignment is consistent for a given N.

Common Pitfalls

There is some potential for user error in setting up a Disjoint Group target.

For example, if you have two related experiences for which you want to assign visitors to disjoint groups, you must set up a Disjoint Group target in both experiences.

In the first experience you configure the target with six disjoint groups and that only visitors in group 1 should qualify for the experience.

The screenshot shows the 'Disjoint Group' configuration page. At the top, there are tabs for 'WHO', 'TARGET TYPE', 'LANDING', and 'DISJOINT GROUP', with 'DISJOINT GROUP' being the active tab. A button labeled '< RETURN TO SELECT TARGET' is in the top right. The main heading is 'Disjoint Group'. Below it, a descriptive text reads: 'Triggers an experience when a site visitor falls into a selected disjoint group. (Visitors are assigned to the same disjoint group across experiences. For help, see Disjoint Group Targeting)'. The configuration area contains a text input field for the number of disjoint groups, with a red error message below it: 'Number of groups must be a positive integer.' Below that is a range slider set from 0 to 1, with a red error message: '(Range cannot be selected because the number of Disjoint Groups is empty or 0)'. At the bottom, there is a button labeled 'INCLUDE' followed by a vertical bar icon and the text 'visitors matching this target.'

In the second experience you configure seven disjoint groups and that only visitors in group 1 should qualify for the experience.

This screenshot is identical in layout to the first one, showing the 'Disjoint Group' configuration page. The tabs and return button are the same. The main heading is 'Disjoint Group'. The descriptive text is the same. The configuration area shows the same text input field and red error message: 'Number of groups must be a positive integer.' The range slider is also set from 0 to 1 with the same red error message: '(Range cannot be selected because the number of Disjoint Groups is empty or 0)'. The 'INCLUDE' button and its associated text are also present at the bottom.

Because the number of disjoint groups differs between the experiences, visitors who are assigned to group 1 in the first experience may not be assigned to group 1 in the second experience.